
SEER ROBOTICS

Build your own robot fleet within days.





Safety SEER Counterbalance Truck

SCB-2000EU

CE Safety Certification, Intelligent High Load Capacity

CE Certification, Safety Guaranteed

The robot has passed the CE safety certification (ISO3691-4:2023) and other related certifications, ensuring safer operation.

AI Carrier Recognition, Precise and Efficient

Equipped with the AI deep recognition algorithm and the deep recognition camera, it can identify the carriers in real time. The truck can be manually adjusted within a range of 400 mm to 700 mm. It supports pallets, racks and cages of multiple sizes and types. It can recognize (such as nine-legged pallets, open pallets, and non-standard pallets) from multiple angles with high precision.

15-hour Long Endurance, 2-Minute Quick Battery Swap

Supports beginners with a 2-minute quick battery swap, ensuring worry-free endurance. Equipped with a 48V / 315 Ah battery for 12-15 hours of long endurance, paired with a 48 V fast-charging pile. Just 10 minutes of charging provides half an hour of operation.

360° Scanning Range, Multi-layer Safety Protection

The 360° maximum scanning range and 40 m detection range provides a broader vision and enhanced safety. Equipped with 2D obstacle avoidance laser, distance sensor and hardware self-checks, our robot offers you unparalleled multi-layer safety protection.


Flexible Customization with 4 Options


Supports customization of fork width, vehicle height, color and logo. Tailor-made to meet the diverse requirements of your unique business scenarios.


Ultrasonic Detection, Safe Stacking

Real-time ultrasonic detection of the separation status between goods and forks, coupled with adaptive laser dynamic monitoring of load height during stacking, ensuring safe stacking.

	● Standard ○ Optional	
	Product model	SCB-2000EU
Basic parameters	Operation type	Automatic navigation
	Navigation type	Laser SLAM
	Pallet type	Open pallet / closed pallet
	Rated load capacity	2000 kg
	Load center distance	500 mm
	Weight (with battery)	3230 / 3410 kg
	Standard lifting height	3000 / 4000 mm
	Forklift dimensions: L x W x H	2839 x 1161 x 2250 mm 2851 x 1161 x2327 mm
	Fork dimensions: L x W x H	1220 x 133 x 40 mm
	Fork outer width	400 to 700 mm
	Right-angle stacking aisle width, pallet 1000×1200 (1200 placed along the fork)	2997+200 mm 3007+200 mm
	Right-angle stacking aisle width, pallet 800×1200 (1200 placed along the fork)	2997+200 mm 3007+200 mm
	Right-angle stacking aisle width, pallet 1000×1000 (1000 placed along the fork)	2985+200 mm 2995+200 mm
	Minimum turning radius	1585 mm
	Ambient temperature and humidity range	TEMP: 0℃ to 50℃ / RH: 10% to 90%, no compression, no condensation
Performance parameters	Driving speed: full load / no load	1.0 / 1.5 m/s
	Passability (slope / step / gap)	< 5% / 10 mm / 30 mm
	Navigation position accuracy	±10 mm
	Navigation angle accuracy	±1°
Battery parameters	Battery specifications	48 V / 315 Ah (lithium iron phosphate)
	Comprehensive battery life	12 h to 15 h
	Charging time (10% to 80%)	3 h to 5 h
	Charging method	Manual / Automatic
Function configurations	Lidar number	1 (P+F R2000) +3 (SICK HV) or 1 (P+F R2000) +2 (SICK HV) +1 (C200)
	Wi-Fi roaming	●
	3D obstacle avoidance	○
	Pallet recognition	●
	Cage stack [3]	○
	High shelf pallet recognition [3]	○
	Pallet stack [5]	○
	HMI display	●
Safety configurations	E-stop button	●
	Sound and light indicator	●
	Braking distance: 1 m/s / 1.5 m/s	≤30 cm / ≤50 cm
	360° laser protection	●
	Fork height protection	●
Certifications	ISO 3691-4	●
	EMC	●
	UN38.3	●
	RED	●
	Global series	Yes
	Product series	SEER Counterbalance Truck

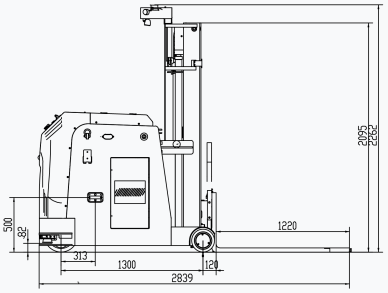

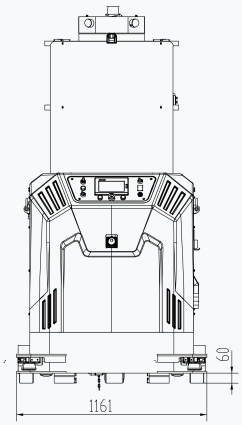

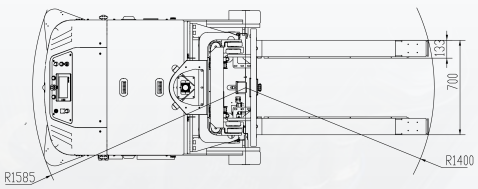

Dimension: 3-meter lifting height for example

Linkedin YouTube

Tel: +86-18321029192 E-mail: contact@seer-robotics.ai Web: seer-robotics.ai